

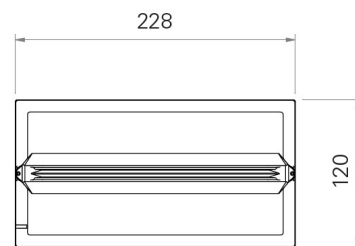


FT2SE400ATL18IP

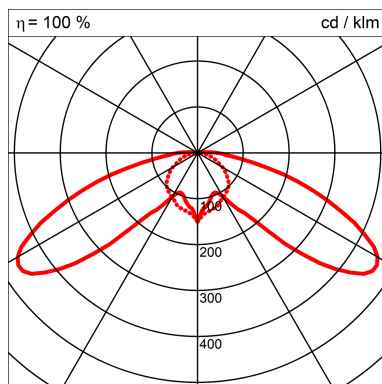

Luminaire

Hersteller	Eaton Emergency Lighting
No d'article	FT2SE400ATL18IP
Nom du produit	FLEXITECH SE (3Hr Self contained)
Product group	escape luminaires
Mode de montage	Construction
Lieu de montage	Plafond, Mur
Unité de contrôle	EVG
Marquage	CE

Model / Variant / Configuration

Nombre / Nom	---
--------------	-----

Description

Product without accessories

Caractéristiques du luminaire

Photométrie absolue	
Classe LiTG	A11
CIE Flux codes	19 53 87 98 100
Unité de contrôle	EVG
Classe de protection	II (isolant de protection)
Degré de protection	IP 65

Dimensions

Longueur/Largeur/Hauteur

230mm/120mm/20mm

Description

FlexiTech LED emergency luminaire with self test

Light distribution optimised for escape routes

Luminous flux value for 3 hour duration is 200lm

Values for other durations (1hr, 400lm / 2hr, 230lm / 8hr, 75lm)

Battery Pack, LifePo 3,2 V / 3 Ah

Accessories available,

FT2-RKC Recess Kit for Ceiling, compatible with FlexiTech SE and FlexiTech ED (ceiling position)

FT2-WG Wire Guard, compatible with FlexiTech SE and FlexiTech ED

FT2SE-RB Recessed Box for plaster and brick compatible with FlexiTech SE

FT2SE-LO Lens with light distribution optimized for Open area, compatible with FlexiTech SE

40071352379 Eaton Magnet for lighting configuration and manual tests

FT-BAT3 Battery Pack, LifePo 3,2 V / 3 Ah